

# CS9138



→ [360° View](#)

## ★ Awards

### • 8-Port PS/2 KVM Switch

→ CS9138 is a high-efficiency KVM Switch which provides the most efficient solution to fulfill the management needs of server networks. It is a KVM Switch with 8 ports and can control 8 computers. It allows connections in 3 tiers by cascade. With 73 sets of CS9138, users can connect up to 512 servers.

**Patent NO. :** TW 148431 (Taiwan) ,US 5,978,389 (USA) ,CN ZL 98202407 X (China) ,DE 29806131.7 (German)


## I Features

- One PS/2 console controls 8 computers.
- Cascadable up to 3 levels - provides up to 512 computers.
- Computer selection via front panel pushbuttons, hotkeys or On Screen Display (OSD).
- Keyboard and mouse emulation for error free booting.
- Supports Microsoft IntelliMouse, Logitech MouseMan, FirstMouse, IBM Scrollpoint Mouse.
- OSD automatically adjusts to resolution changes.
- Auto Scan function to monitor computer operation.
- Superior video quality: up to 1920 x 1440; DDC2B.
- Available in silver and black.
- Special design for easy stacking.
- Rack mountable in 19" (1U) system rack.
- Multiplatform support: Windows 2000/XP/[Vista](#), Linux and FreeBSD.
- For more information about KVMs which can connect to CS9138, see [Compatible KVM Table](#).

## I Package Content

- 1x 8-Port PS/2 KVM Switch
- 1x Power Adapter
- 1x Rack Mount Kit
- 1x User Manual
- 1x Quick Start Guide

## I Diagram

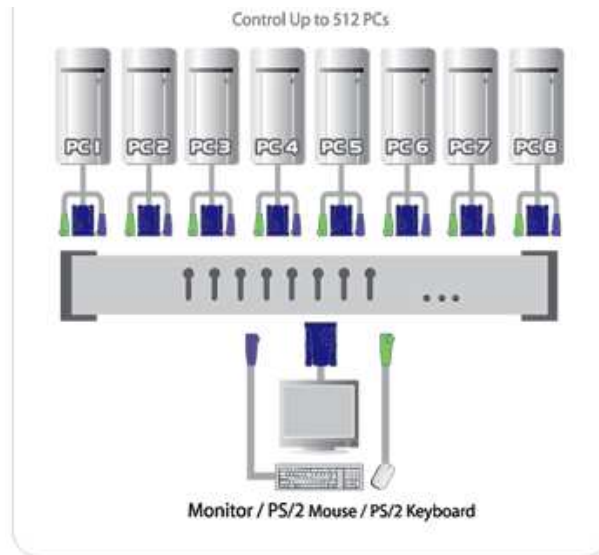

+ [View enlargement](#)

## I Specification

<b>Computer Connections</b>	Direct	8	
	Max.	512 (via Cascade)	
<b>Port Selection</b>		Hotkey, Pushbutton, OSD	
<b>Connectors</b>	Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x 6-pin Mini-DIN Female (Green)
	KVM Ports	Keyboard	8 x 6-pin Mini-DIN Female (Purple)
		Video	8x HDB-15 Male (Blue)
		Mouse	8x 6-pin Mini-DIN Female (Green)
Power		1 x DC Jack (Black)	
<b>Switches</b>	Power	8x Pushbutton	
<b>LEDs</b>	On Line	8 (Green)	
	Selected	8 (Orange)	
	Power	1 (Blue)	
<b>Emulation</b>	Keyboard	PS/2	
	Mouse		
<b>Video</b>		1920 x 1440; DDC2B	
<b>Scan Interval</b>		3,5,10,15,20,30,40,60 Seconds	
<b>Power Consumption</b>		DC9V, 1.08W	
<b>Environment</b>	Operating Temp.	0-50°C	
	Storage Temp.	-20-60°C	
	Humidity	0-80% RH, Non-condensing	
<b>Physical Properties</b>	Housing	Metal	
	Weight	2.85 kg	
	Dimensions ( L x W x H )	45.00 x 17.00 x 6.70 cm	

\* The specification and pictures are subject to change without notice.

\* All trademarks and logos are the properties of their respective holders.